

GC800 Series



FEATURES & OPTIONS

- UL Listed (UL 10C)
- Universal application & non-handed installation
- Constructed with precise aluminum die-cast body with steel arm
- A heat-treated steel rack & pinion immersed in high-grade oil operate a nest of coils to give a smooth precise action & minimum wear
- Stable hydraulic fluid for any climatic operation & constant lubrication
- Adjustable closing and latching speed
- Stable hydraulic fluid capable of withstanding temperature ranges of 105 degrees F. to -25 degrees F.

PACKAGE INCLUDES

- Parallel bracket
- Wood screws and machine screws

FINISHES

- Aluminum (painted)
- Dark Brown (painted)
- Gold Brass (painted)

WARRANTY

- 10 years mechanical warranty
- Five years finish warranty




CODE COMPLIANCE

- ANSI A156.4 Grade 2
- UL10C and UBC 7.2 for positive pressure

SPECIFICATIONS

Closer: Closers shall be by Pamex model # **GC802, GC803 or GC804**, full rack and pinion type with cast aluminum alloy body. All closers shall be provided with non-critical valves adjustment to independently regulate the sweep, latch and back-check.

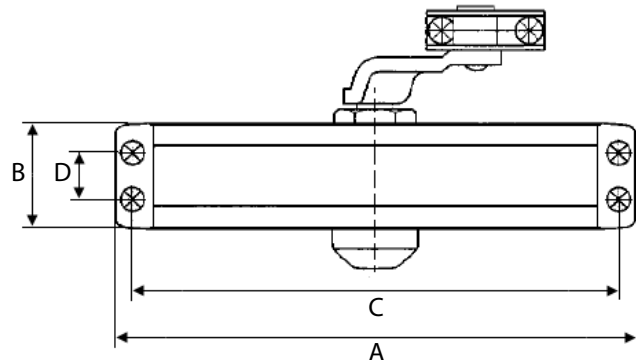

Description	GC802	GC803	GC804
Door weight range (lbs)	60~110	90~155	135~210
A. Length of door closer body	8-1/8"	8-13/16"	9-7/8"
B. Height of door closer body	1-3/4"	1-3/4"	1-7/8"
C. Horizontal mounting holes	7-1/2"	8-3/16"	9/1/8"
D. Vertical mounting holes	3/4"	3/4"	3/4"